


Tube Rolling Machine



Specification

- Two Drive Machine (1HP & 2HP)
- Versatile Machine for Rolling and Fabrics on Cardboard or PVC tube.


Batch to Batch Inspection Machine

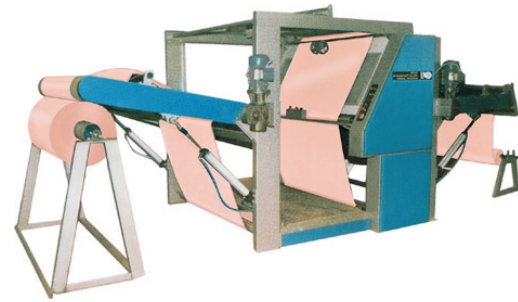

Selwedge Shifting Device For Stenter M/C




Wef & Bow Device for Stenter Machine



Amba 1



Amba 2



Amba 3



Amba 4


Paper Tube roll fold machine



Single / Double Folding & Plaiting Machine



Length cutter machine For Terry Towel Fabric

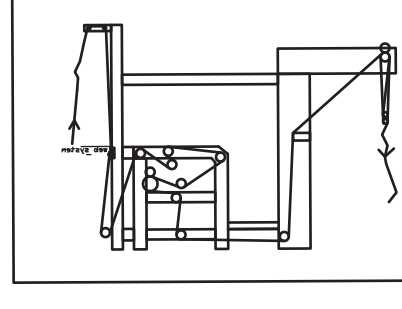

Ambatex Engineers

39 SHANKAR ESTATE, NR. REVABHAI ESTATE CTM,
AMRAIWADI, AHMEDABAD - 380026 Gujarat - India
(O): 079 - 25861641
(M): +91-9426172199 | +91-9033877507
Email ID: amba_texeng@yahoo.com
Web: www.ambatexengineers.com

EXPERIENCE OUR EXPERTISE

www.ambatexengineers.com

Experience our Expertise

Fabric Inspection cum Rolling Machine



Specification

- Working width range 1800 mm to 3600 mm.
- Working Speed variable 0.50 mtrs/min. AC Inverter System.
- Mechanical Counter meter (Electronic Digital Meter Optional)
- Various Options for Fabric input & Output.
- Edge guide control by power pack system.
- Emergency stop from one side of machine.
- Inspection Roll holding arrangement

Fabric Inspection Loose to Tube rolling cum Plaiting Machine.



Specification

- Working width range 1800 mm to 3600 mm.
- Working Speed variable 0.50 mtrs / min.
- Three Drive AC Inverter System.(1HP 1 Nos. 2 HP 2 Nos.)
- Mechanical Counter meter (Electronic Digital Meter Optional)
- Various Options for Fabric input & Output.
- Edge guide control by power pack system.
- Emergency stop from one side of machine.
- Inspection Roll holding arrangement

Brushing Machine Specially Made for Finishing of Corduroy Fabrics.



Specification

- Working width range 1800 to 3000 mm.
- Robust Structure . M.S. Channel / Metal Sheet Structure.
- Working speed 0-12 meters / min.
- Canvas belts with attached brush moving on fabric.

Fabric Inspection Cum Plaiting Machine



Specification

- Working width range 1800 mm to 3600 mm.
- Working Speed variable 50 mtrs / min.
- Two Drive AC Inverter System.(1HP 1 Nos. 2 HP 1 Nos.)
- Mechanical Counter meter (Electronic Digital Meter Optional)
- Various Options for Fabric input & Output.
- Emergency stop from one side of machine.


Batching Machine



Specification

- A machine for batches of cloth on trolleys
- The Positive driven batch roll is Pneumatically operated and speed of roll is variable by A.C inverter system. (3 HP)

Stretch Wrapping Machine

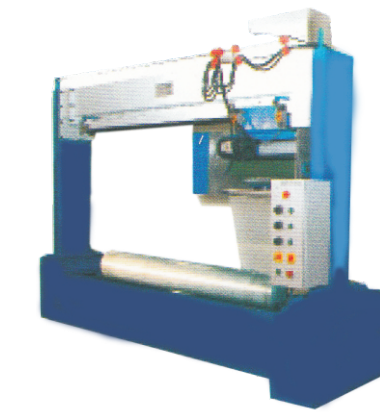

Specification

- Working width range 1800 mm to 3200 mm.
- Wrapping of roll up to 600 mm Dia.
- Simple to operate machine.
- Labour, Time & money Saving
- Highly durable, dust & moisture Proof Packing
- Invertor Driven.

Peach Finish Emerizing Machine.



➔ Designed for cotton synthetic & blended fabric to Impart Soft Finish like peach Skin effect on one side of fabric. The fabric gives comfortable feel and so this machine offers value addition.

Specification

- Fabric treatment - One side
- No. of sueding Pneumatics cylinders - 5 (Five)
- Fabric Speed - 0-25 mtrs. / min.
- Length / Width / Height - 5000/3000/3300 mm.

Experience our Expertise